



6L5-G

6L5-G

DETECTOR AMPLIFIER TRIODE

Heater	Coated Unipotential Cathode	
Voltage	6.3	a-c or d-c volts
Current	0.15	amp.
Direct Interelectrode Capacitances:*		
Grid to Plate	2.7	μf
Grid to Cathode	3.0	μf
Plate to Cathode	5.0	μf
Maximum Overall Length		4-1/8"
Maximum Diameter		1-9/16"
Bulb		ST-12
Base	Small Shell Octal 6-Pin	
Pin 1-No Connection		Pin 5-Grid
Pin 2-Heater		Pin 7-Heater
Pin 3-Plate		Pin 8-Cathode



BOTTOM VIEW

AMPLIFIER - Class A


Operating Conditions and Characteristics:

Heater *	6.3	6.3	volts
Plate	135	250 max.	volts
Grid	-5	-9	volts
Amp. Fact.	17	17	
Plate Res.	11200	9000	ohms
Transcond.	1500	1900	μmhos
Plate Cur.	3.5	8	ma.
Grid Bias **	-11	-20	approx. volts

** For cathode current cut-off.

* In circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible.

* with tight-fitting shield.

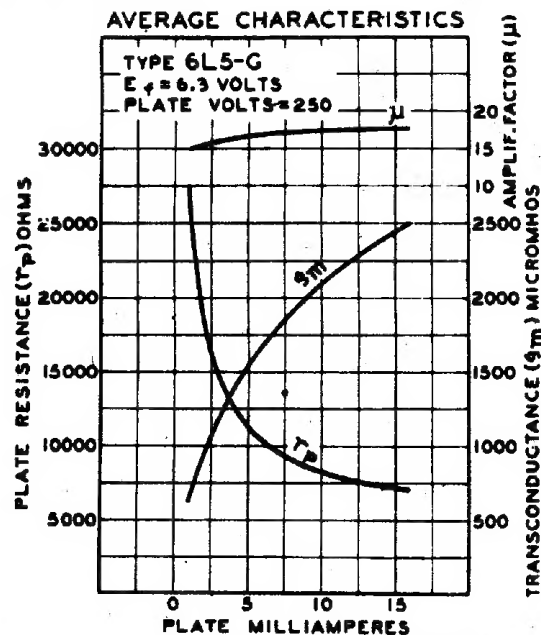

APRIL 20, 1938

RCA RADIODIVISION
RCA MANUFACTURING COMPANY, INC.


DATA

6L5-G



6L5-G

AVERAGE PLATE CHARACTERISTICS

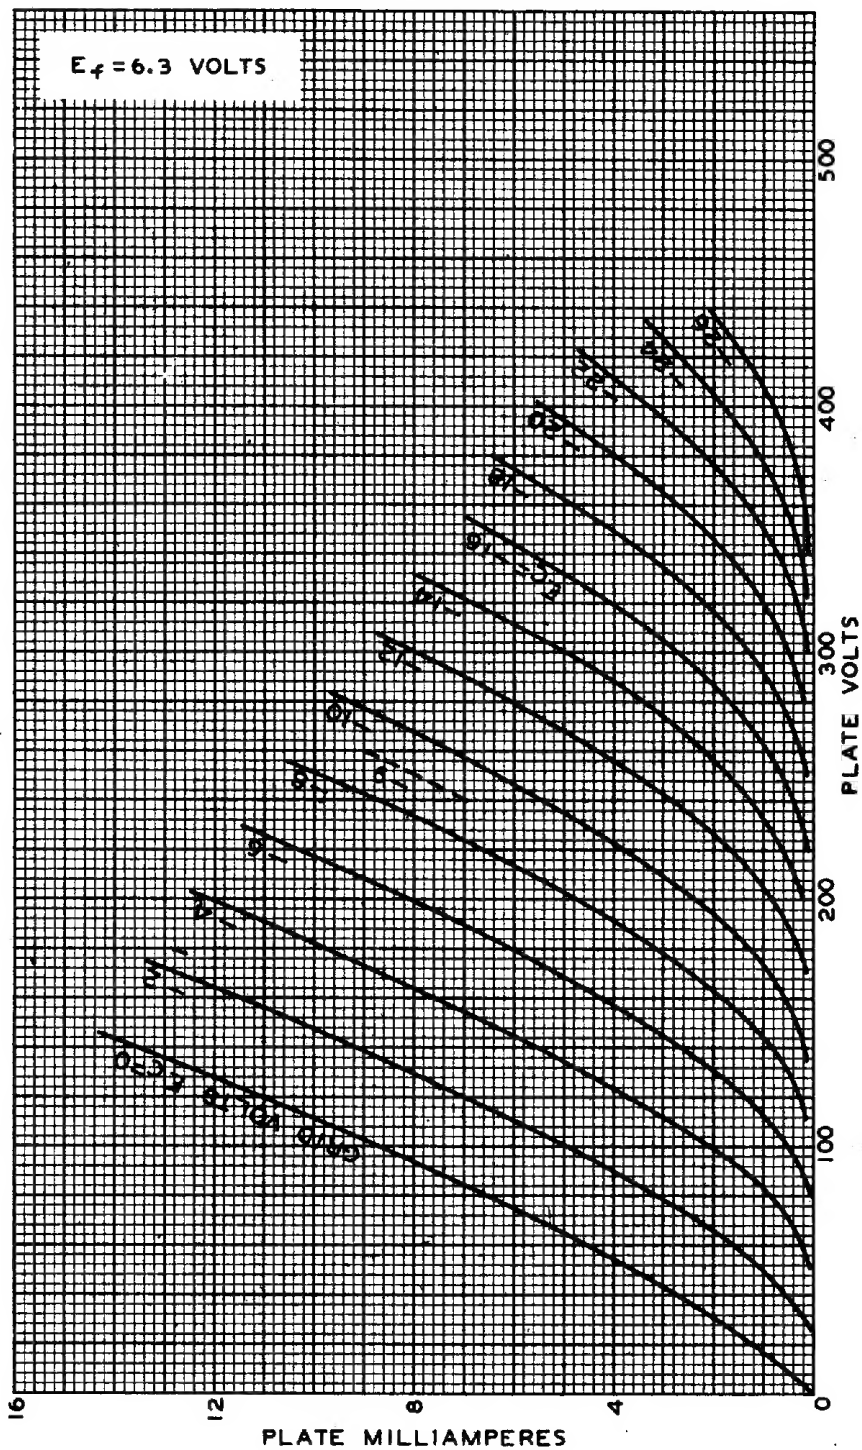

MARCH 8, 1938

RCA RADOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-4893